




HAYDON®

Get Strut Done.

Submittal Sheets

A-324

"Z" Angle
Wt. 70#/C

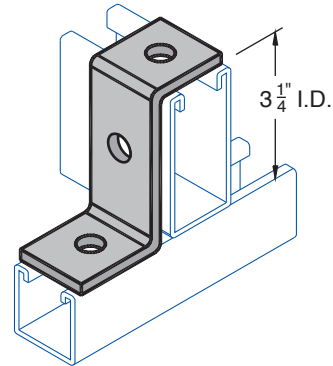

Specifications

GENERAL

H-STRUT General Fittings are designed to fit with all H-STRUT 1 $\frac{5}{8}$ " wide channels. All H-STRUT fittings are manufactured from $\frac{1}{4}$ " thick carbon steel, 1 $\frac{5}{8}$ " wide, all holes are $\frac{9}{16}$ " diameter, spaced 1 $\frac{7}{8}$ " on center and $\frac{13}{16}$ " from the end.

MATERIAL

H-STRUT fittings are manufactured from the following material:

- ☐ Hot Rolled Steel SheetASTM A-1011 or Cold Rolled Steel SheetASTM A-1008
- ☐ Stainless Steel-Type 304/316L . . .ASTM A-240
- ☐ Aluminum FittingASTM B-221

FINISHES

H-STRUT fittings are available in the following finishes: (See technical section for additional information)

- ☐ Electro GalvanizedASTM B-633
- ☐ Hot Dipped Galvanized.ASTM A-123
- ☐ Zinc Trivalent Chromium.ASTM B-633-85
- ☐ Powder Coated Supr-Green. . . .ASTM B-117
- ☐ PVC Coating - Available Upon Request

ORDERING

Please specify catalog number and finish.

Fittings Notes:

Holes are $\frac{9}{16}$ " diameter, spaced 1 $\frac{7}{8}$ " on center and $\frac{13}{16}$ " from end.

Project Information		
Project:		Notes:
Address:		
Contractor:		
Engineer:	Date:	
Approval		
<input type="checkbox"/> Approved	Signature:	Remarks:
<input type="checkbox"/> Approved as Noted		
<input type="checkbox"/> Not Approved		