


## B-603

### Knee Brace

Catalog No.	A	B	Wt./100 Pcs.
<b>B-603-1</b>	16 <sup>5</sup> / <sub>8</sub> "	13 <sup>5</sup> / <sub>8</sub> "	232
<b>B-603-2</b>	12"	10 <sup>1</sup> / <sub>8</sub> "	175
<b>B-603-3</b>	24"	19 <sup>5</sup> / <sub>8</sub> "	317

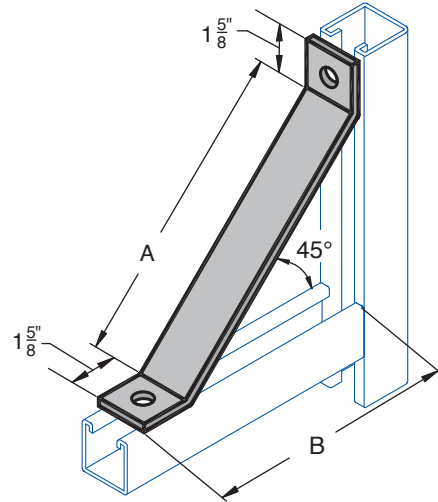

## Specifications

### GENERAL

H-STRUT General Fittings are designed to fit with all H-STRUT 1<sup>5</sup>/<sub>8</sub>" wide channels. All H-STRUT fittings are manufactured from 1/4" thick carbon steel, 1<sup>5</sup>/<sub>8</sub>" wide, all holes are 9/16" diameter, spaced 1<sup>7</sup>/<sub>8</sub>" on center and 1<sup>3</sup>/<sub>16</sub>" from the end.

### MATERIAL

H-STRUT fittings are manufactured from the following material:

- ☐ Hot Rolled Steel Sheet . . . . .ASTM A-1011 or Cold Rolled Steel Sheet . . . . .ASTM A-1008
- ☐ Stainless Steel-Type 304/316L . . .ASTM A-240
- ☐ Aluminum Fitting . . . . .ASTM B-221

### FINISHES

H-STRUT fittings are available in the following finishes: (See technical section for additional information)

- ☐ Electro Galvanized . . . . .ASTM B-633
- ☐ Hot Dipped Galvanized. . . . .ASTM A-123
- ☐ Zinc Trivalent Chromium. . . . .ASTM B-633-85
- ☐ Powder Coated Supr-Green. . . .ASTM B-117
- ☐ PVC Coating - Available Upon Request

### ORDERING

Please specify catalog number and finish.

### Fittings Notes:

Holes are 9/16" diameter, spaced 1<sup>7</sup>/<sub>8</sub>" on center and 1<sup>3</sup>/<sub>16</sub>" from end.

Project Information		
Project:		Notes:
Address:		
Contractor:		
Engineer:	Date:	
Approval		
<input type="checkbox"/> Approved	Signature:	Remarks:
<input type="checkbox"/> Approved as Noted		
<input type="checkbox"/> Not Approved		