


T-610

Single Channel Bracket

Catalog No	Size A	Uniform Load Capacity (Lbs)
T-610-6	6"	1,932
T-610-12	12"	1,107
T-610-18	18"	759
T-610-24	24"	332

Note: 1. Loads Based On Actual Independent Lab Testing On 12 Gage Channel
2. Safety Factor = 2.5

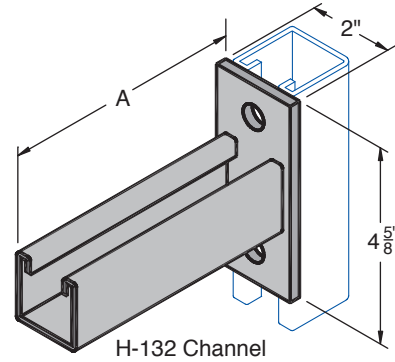

SPECIFICATIONS

GENERAL

Brackets are designed to support pipe or conduit either suspended from threaded rod or supported as a cantilever from the wall. Note: These brackets can also be used in conjunction with electrical fittings.

MATERIAL

H-STRUT Hanging Supports are produced from our standard channels.

- ☐ Hot Rolled Steel SheetASTM A-1101 or Cold Rolled Steel SheetASTM A-1008
- ☐ Stainless Steel-Type 304/316. . .ASTM A-240
- ☐ Aluminum.ASTM B-221

FINISH

H-STRUT brackets are available in the following finishes:

- ☐ Electro-GalvanizedASTM B-633
- ☐ Hot Dipped Galvanized.ASTM A-123
- ☐ Zinc Trivalent ChromiumASTM B-633-85
- ☐ Powder Coated Supr-Green . . .ASTM B-117
- ☐ PVC Coating - Available Upon Request

ORDERING

Specify catalog number, length and finish.

Fittings Notes:

Holes are $\frac{9}{16}$ " diameter, spaced $1\frac{7}{8}$ " on center and $1\frac{3}{16}$ " from end.

Project Information		
Project:		Notes:
Address:		
Contractor:		
Engineer:	Date:	
Approval		
<input type="checkbox"/> Approved	Signature:	Remarks:
<input type="checkbox"/> Approved as Noted		
<input type="checkbox"/> Not Approved		