


T-622

Shelf Bracket (Right-Hand Shown)

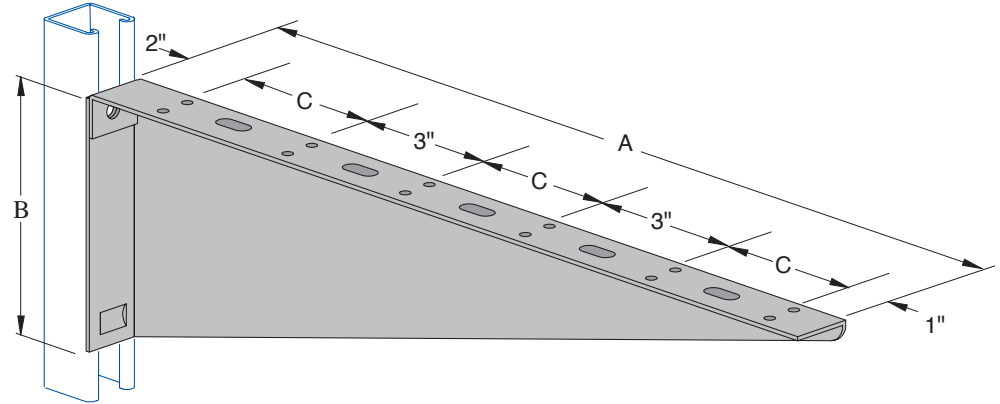

Catalog No.		A	B	C	Wt./100 Pcs.
Left Hand	Right Hand				
T-622/24-L	T-622/24-R	24"	6 ⁷ / ₁₆ "	5"	400
T-622/26-L	T-622/26-R	26"	6 ¹⁵ / ₁₆ "	5 ¹¹ / ₁₆ "	445
T-622/28-L	T-622/28-R	28"	7 ⁷ / ₁₆ "	6 ⁵ / ₁₆ "	493
T-622/30-L	T-622/30-R	30"	7 ¹⁵ / ₁₆ "	7"	545

Notes:

Hole Dim. ⁹/₃₂", Slot Dim. ³/₈" x 1"

SPECIFICATIONS

GENERAL

Brackets are designed to support pipe or conduit either suspended from threaded rod or supported as a cantilever from the wall. Note: These brackets can also be used in conjunction with electrical fittings.

MATERIAL

H-STRUT Hanging Supports are produced from our standard channels.

- ☐ Hot Rolled Steel SheetASTM A-1101 or Cold Rolled Steel SheetASTM A-1008
- ☐ Stainless Steel-Type 304/316 . . .ASTM A-240
- ☐ AluminumASTM B-221

FINISH

H-STRUT brackets are available in the following finishes:

- ☐ Electro-GalvanizedASTM B-633
- ☐ Hot Dipped Galvanized.ASTM A-123
- ☐ Zinc Trivalent ChromiumASTM B-633-85
- ☐ Powder Coated Supr-Green . . .ASTM B-117
- ☐ PVC Coating - Available Upon Request

ORDERING

Specify catalog number, length and finish.

Fittings Notes:

Holes are ⁹/₁₆" diameter, spaced 1⁷/₈" on center and ¹³/₁₆" from end.

Project Information		
Project:		Notes:
Address:		
Contractor:		
Engineer:	Date:	
Approval		
<input type="checkbox"/> Approved	Signature:	Remarks:
<input type="checkbox"/> Approved as Noted		
<input type="checkbox"/> Not Approved		